




PRODUCT SPECIFICATION SHEET

UNDER FLOOR TRANSDUCER

MODEL SM-TU-1650

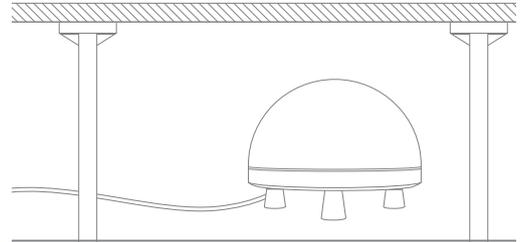

SPECIFICATIONS

Model	SM-TU-1650
Inclusions	<ul style="list-style-type: none"> › 6 metre connection lead with matching plugs › 6 step rotary switch including off position › Mounting cable › Built in crossover and transformer › Heat proof enclosure
Colours	White
Speaker	6.5" woofer with dual neodymium magnet; 8ohm impedance
Dimensions & Weight	230 x 180mm, 1.6 kg
Compliance	 <p>UL94.V-0. Manufactured to ISO 9001:2000</p>

DESIGN FEATURES

Soundmask's SM-TU-1650 transducer is purpose designed and manufactured for continuous sound masking service.

The transducer comes complete with a 500mm connecting lead with inlet and outlet connections. Cable connectors are pre-cut for easy installation. Manufactured with halogen-free wiring to conform with Soundmask's Environmental Sustainability policy.

The transducers are designed for location under the floor, for example an access floor, pictured above. Such floors are manufactured from steel and concrete composite, requiring powerful transducers to ensure the correct penetration of sound.

Distributed by: